


# PC-Based Screening Audiometer AVANT AIR+

Welcome to the  
New Generation

Small Footprint  
Approx. 5" x 5" x 1.25"



**NEW**  
Screening  
Audiometer

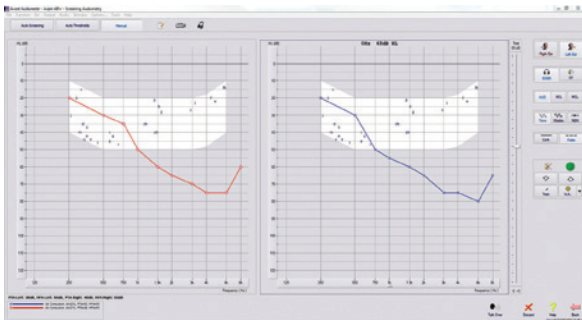

The AVANT AIR+ has air threshold capabilities allowing additional versatility. The small footprint makes it an ideal air audiometer for traveling. Use this product for community screenings where air thresholds are needed.

- Air Threshold Testing
- Automatic Air Audiometry Testing
- 125 Hz - 8 kHz
- Small Footprint -  
Approx. 5" x 5" x 1.25"
- PC Based via USB Connection
- NOAH™ Compatible

# AVANT™ AIR+

**MedRx, Inc**  
1200 Starkey Rd., Suite 105,  
Largo, FL 33771  
727-584-9600  
Toll Free: 888-392-1234  
Fax: 727-584-9602  
Email: sales@medrx-usa.com  
Web: www.medrx-usa.com

# Welcome to the New Generation

## Specifications

# AVANT AIR<sup>+</sup>

## About MedRx

MedRx, Inc. is a U.S. based global manufacturer and innovator of advanced computerized diagnostic and hearing instrument fitting technologies, specifically designed for the hearing care professional.

MedRx has created a remarkable New Generation of discreet, yet powerful PC-based instrumentation for Audiometry, Real Ear Measurement, Live Speech Mapping, Tinnitus Assessment, Hearing Instrument Testing & Evaluation and Video Otoscopy.

## Standard Accessories

- DD65 Headphones
- Operator Mic / Monitor Headset
- Patient Response Switch
- Talkback Microphone
- USB Cable, Software & Manuals
- Carrying Case

## Option

- Tinnitus Assessment Module

## Minimum Computer Requirements

- Windows® PC compatible computer
- Intel™ i5 Dual Core, 2.0 GHz or better
- 4 GB RAM, 20 GB free hard drive space
- Available 2.0 USB ports
- Windows 7, 8 or 10 Professional (32 or 64-bit)

## Technical Specifications

<b>Standards:</b>	Screening Audiometer as per ANSI S3.6-2010, IEC 60645-1:2012, Type 4; Tone Audiometry
<b>Outputs:</b>	DD65 Headphones
<b>Frequency Range:</b>	Air: 125 Hz – 8 kHz
<b>Tinnometer Frequency Range:</b>	Air: 125 Hz – 16 kHz (Optional)
<b>Max Output:</b>	Air Conduction: 100 dB HL For MidRange Frequencies,
<b>Attenuation:</b>	1 dB Step or 5 dB Step, User Selectable
<b>Optional Accessories:</b>	DD450 Headphones, DD45 Headphones & Insert Earphones
<b>Compatible with:</b>	NOAH™, TIMS® and SycleNet™
<b>Power Requirements:</b>	USB-powered
<b>Dimensions:</b>	Approx. 5" x 5" x 1.25" (L x W x H) Approx 12 cm x 12 cm x 3 cm (W x D x H)
<b>Net Weight:</b>	< 1 lbs • < 500 g
<b>Standard Accessories:</b>	DD65 Headphones, Patient Response Switch, Talkback Microphone, Operator Mic, Monitor Headset, Software & Manuals, Carrying Case

