



**AVANT AIR+**  
Screening Audiometer


## Ideal Audiometer for Traveling

Use for Community Screenings where  
Only Air Thresholds Are Needed.

# MedRx®

## 888-392-1234

To Schedule An Online Demo

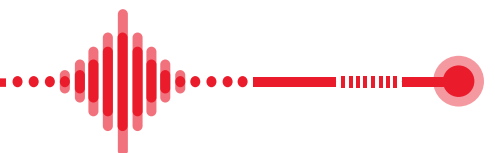

# AVANT AIR+

## Technical Specs

**Standards:** Screening Audiometer As Per ANSI S3.6, IEC 60645-1, Type 4; Tone Audiometry

**Outputs:** DD65v2 Headphones

**Frequency Range:** Air: 125 Hz – 8 kHz

**Max Output:** Air Conduction: 100 dB HL For Mid-Range Frequencies

**Attenuation:** 1 dB Step Or 5 dB Step, User Selectable

**Compatible with:** Noah, TIMS®, Blueprint OMS And Sycle

**Power Requirements:** USB-Powered

**Dimensions:** Approx. 12 cm x 12 cm x 3 cm (L x W x H)  
Approx. 5" x 5" x 1" (L x W x H)

**Weight:** < 500 g < 1 lb

**Standard Accessories:** DD65v2 Headphones, Patient Response Switch, Talkback Microphone, Operator Mic / Monitor Headset, Software & Manuals, Carrying Case

**Optional Accessories:** DD450 Headphones, DD45 Headphones Or Insert Earphones

**MedRx Minimum Computer Specs:**

Windows® PC compatible computer, Intel™ i5, 2.0 GHz or better. 4 GB RAM. 20 GB free hard drive space. Available 2.0 USB Port. Windows 10 or 11 Professional (32 Or 64-Bit).

## AVANT AIR+ Features

- Air Threshold Testing
- Automatic Air Audiometry Testing
- 125 Hz - 8 kHz
- Small Footprint: Approx. 5" x 5" x 1" (L x W x H)  
Approx. 12 cm x 12 cm x 3 cm (L x W x H)
- PC-based via USB Connection
- HID device - True Plug and Play
- Noah, TIMS, Blueprint OMS and Sycle Compatible

# MedRx®

Good Things Come In Small Packages

**MedRx, Inc**

1200 Starkey Rd. #105

Largo, FL 33771 U.S.A.

888-392-1234 • 727-584-9600

Fax: 727-584-9602

Email: [sales@medrx-diagnostics.com](mailto:sales@medrx-diagnostics.com)

[www.medrx-diagnostics.com](http://www.medrx-diagnostics.com)



AVANT AIR+ comes standard with the DD65v2 Headphones.

