




**MedRx Tinnometer**  
Tinnitus Assessment

## Revolutionary Tinnitus Assessment

The MedRx Tinnometer  
Provides A Whole New Approach  
To Tinnitus Assessment.

Test & Track Changes In Tinnitus  
Easily with Noah Sessions.

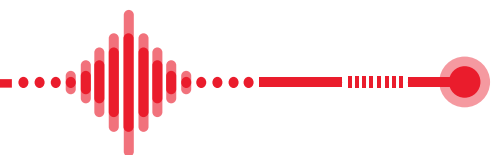

# MedRx Tinnometer

## Technical Specs

**Standards:** Screening Audiometer As Per ANSI S3.6, IEC 60645-1, Type 4; Tone Audiometry, Tinnitus Assessment

**Outputs:** DD450 Headphones

**Frequency Range:** Air: 125 Hz – 8 kHz

**Tinnometer Frequency Range:** Air: 125 Hz – 16 kHz

**Max Output:** Air Conduction: 100 dB HL For Mid-Range Frequencies

**Attenuation:** 1 dB Step Or 5 dB Step, User Selectable

**Compatible with:** Noah, TIMS®, Blueprint OMS And Sycle

**Power Requirements:** USB-Powered

**Dimensions:** Approx. 12 cm x 12 cm x 3 cm (L x W x H)  
Approx. 5" x 5" x 1" (L x W x H)

**Weight:** < 500 g < 1 lb

**Standard Accessories:** DD450 Headphones, Patient Response Switch, Talkback Microphone, Operator Mic / Monitor Headset, Software & Manuals, Carrying Case

**Optional Accessories:** DD45 Headphones Or Insert Earphones

### MedRx Minimum Computer Specs:

Windows® PC compatible computer, Intel™ i5, 2.0 GHz or better. 4 GB RAM. 20 GB free hard drive space. Available 2.0 USB Port. Windows 10 or 11 Professional (32 Or 64-Bit).

## Tinnometer Features

- Control the Level, Shape & Frequency
- Customized Stimulus and Reports
- Test Time Under 10 Minutes
- Save and Recall Sessions
- Quickly Pitch Match
- Testing Up To 16 kHz
- HID device - True Plug and Play
- Noah, TIMS, Blueprint OMS and Sycle Compatible

## Audiometer Features

- Air Threshold Testing
- Automatic Air Audiometry
- 125 Hz - 8 kHz
- USB Connection to Computer
- Small Footprint:  
Approx. 12 cm x 12 cm x 3 cm (L x W x H)

# MedRx®

Good Things Come in Small Packages

### MedRx International

MAICO Diagnostics GmbH

Sickingenstr. 70-71

10553 Berlin, Germany

Phone: +49 30 70 71 46 50

Fax: +49 30 70 71 46 99

Email: medrx-sales@maico.biz

www.medrx-diagnostics.com

Distributed by:



The MedRx Tinnometer has air threshold capabilities allowing additional versatility.

MX-TIN-INTDS-1 Rev. 2

