## **INSTRUCTIONS** FOR USE

**BTE** 



Alta2, Alta, Nera2, Nera, Ria2, Ria



## Introduction to this booklet

This booklet guides you in how to use and maintain your new hearing instrument. Please read the booklet carefully including the **Warning section**. This will help you to achieve the full benefit of your new hearing instrument.

Your Hearing Care Professional has adjusted the hearing instrument to meet your needs. If you have additional questions, please contact your Hearing Care Professional.

| About | Start up | Handling | Options | Warnings | Additionals |

For your convenience this booklet contains a navigation bar to help you navigate easily through the different sections.

## Indication for use

The hearing instrument is intended to amplify and transmit sound to the ear and thereby compensate for mild to severe-to-profound hearing impairment.

#### IMPORTANT NOTICE

The hearing instrument amplification is uniquely adjusted and optimized to your personal hearing capabilities during the instrument fitting performed by your Hearing Care Professional.

# **Table of contents**

A bout

ADOUT	identity your nearing instrument style and ear piece	Ь
	BTE with sound hook and mold	8
	BTE with thin tube (Corda miniFit)	10
	Identify left and right instrument	12
	Battery	13
Start up	Turn the hearing instrument on and off	14
	When to replace a battery	15
	Replace the battery	16
Handling	Caring for your hearing instrument	18
	Sound hook with mold	20
	Put on the instrument with mold	21
	Clean the mold	22
	Wash the mold	23
	Thin tube (Corda miniFit)	24
	Put on the instrument with thin tube	25
	Clean the thin tube	26

Identify your bearing instrument style and ear piece

	Replace dome
	Thin tube with micro mold or LiteTip
	Maintain the micro mold or LiteTip
Options	Optional features and accessories
	Mute the hearing instrument (optional)
	Change programs (optional)
	Change volume (optional)
	Tamper-resistant battery drawer (optional)
	Wireless accessories (optional)
	Other options (optional)
Warnings	Warnings
Additionals	Troubleshooting guide
	Water resistance
	Warranty certificate
	International warranty
	Cell phone
	Technical information


Thin tube with dome or GripTip

# Identify your hearing instrument style and ear piece


There are two different attachments and several different ear pieces which classify your hearing instrument style. Please identify your attachment and ear piece. This will make it easier for you to navigate through this booklet.

☐ BTE with sound hook and mold

An instrument with a sound hook will have a mold as an ear piece.



BTE with thin tube (Corda miniFit) An instrument with a



thin tube will have one of the following ear pieces - dome, GripTip, micro mold, or LiteTip.



Dome (Open dome shown)




GripTip




Micro mold or LiteTip

## BTE with sound hook and mold

## What it is

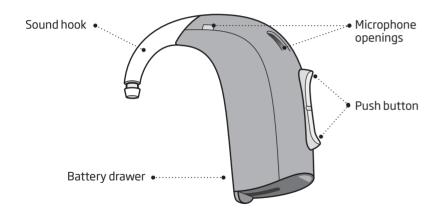


#### What it does

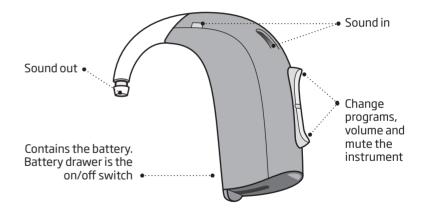


## BTE with thin tube (Corda miniFit)

## What it is

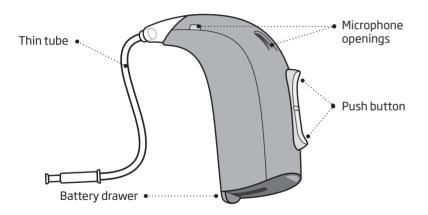


### What it does

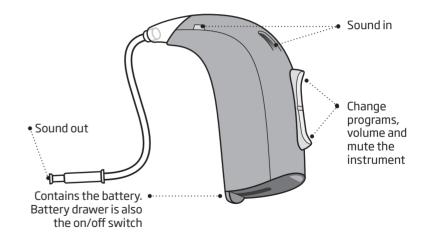


# Identify left and right instrument

It is important to distinguish between the left and the right instrument as they might be programmed differently.

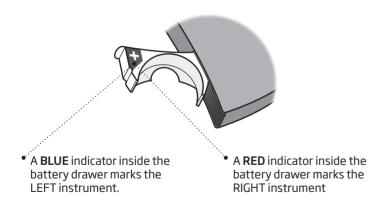

## **Battery**

Your hearing instrument is a miniature electronic device that runs on special batteries. To activate the hearing instrument, you must insert a new battery in the battery drawer. See how in the "Replace the battery" section.

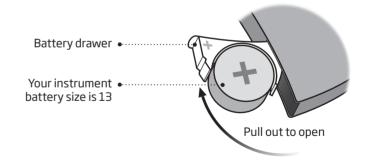

# Turn the hearing instrument on and off

The battery drawer is also used to switch the hearing instrument on and off. To preserve the battery, make sure your instrument is switched off when you are not wearing it.

Turn ON Close the battery drawer with the battery in place.



Turn OFF
Open the
battery drawer

# When to replace a battery

When it is time to replace the battery you will hear two beeps repeated in moderate intervals until the battery runs out.



Two beeps = The battery is running low



= The battery has run out

## Battery maintenance tip

To make sure the hearing instrument is always working bring spare batteries with you, or replace the battery before you leave home.

# Replace the battery

#### 1. Remove



Fully open the battery drawer. Remove the battery.

#### 2. Uncover



Remove the sticky label from the + side of the new battery.

#### 3. Insert



Insert the new battery into the battery drawer. Make sure the + side faces up.

#### 4. Close



Close the battery drawer. The instrument will play a jingle through the ear piece. Hold the earpiece close to your ear to hear the jingle.

## Tip



The MultiTool can be used for battery change. Use the magnetic end to remove and insert batteries.

The MultiTool is provided by your Hearing Care Professional.

# Caring for your hearing instrument

When handling your hearing instrument, hold it over a soft surface to avoid damage if you drop it.

Clean the microphone openings Carefully brush away debris from the openings. Gently brush the surface. Make sure the brush is not pressed in to the openings.




#### IMPORTANT NOTICE

Use a soft, dry cloth to clean the hearing instrument. It must never be washed or immersed in water or other liquids

#### The MultiTool

The MultiTool contains a brush and a wire loop for cleaning ear wax from the mold. The brush can be replaced and purchased from your Hearing Care Professional.



## Sound hook with mold

Read the following pages if you have a hearing instrument with a sound hook and a mold.

The mold is customized for you and fits your ear.



## Put on the instrument with mold

Step 1



Gently pull your ear outwards and press the mold in the direction of the ear canal, twisting slightly.


Step 2



Place the hearing instrument behind your ear.

## Clean the mold

The mold should be cleaned regularly. Use a soft cloth to clean the surface of the mold. Use the MultiTool wire loop to clean the opening.



The tubing between the mold and the instrument should be replaced when it becomes yellow or stiff. Consult your Hearing Care Professional in relation to this.



## Wash the mold

Step 1




Make sure you are able to identify which mold is for which instrument before disconnecting them from the instruments.

Step 2



Disconnect the tube and mold from the hook. Hold the hook firmly when pulling off the tube. Otherwise the instrument may be damaged.

Step 3




Wash the mold and tube using mild soap. Rinse and dry completely before reconnecting to the hearing instrument.

# Thin tube (Corda miniFit)

Read the following pages if your instrument has a thin tube (Corda miniFit) with either a dome, GripTip, micro mold or LiteTip ear piece.

Corda miniFit is a thin tube that brings the sound into your ear. The thin tube should always be used with an ear piece attached. Use only parts designed for your hearing instrument.



## Put on the instrument with thin tube

Step 1



Place the hearing instrument behind your ear.

Step 2



Hold the bend of the tube between your thumb and index finger. The ear piece should point towards the ear canal opening.


Step 3



Gently push the ear piece into your ear canal until the thin tube sits close against the side of your head.

## Clean the thin tube

The thin tube should be cleaned to keep it clear from moisture and wax. If not cleaned it could become blocked with wax which means no sound will be able to come out.

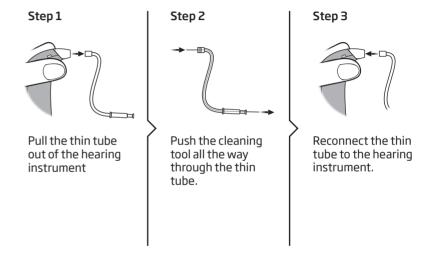

## Thin tube with dome or GripTip

The dome and Grip Tip are made from soft, medically approved rubber material. There are 4 different types of domes. If you have a dome check the type and size below.



Open Dome




Bass,
Single vent



Bass,
Double vent





GripTip

Available in small and large


#### IMPORTANT NOTICE

If the dome is not on the tube when removed from the ear, the dome might still be in the ear canal. Consult your Hearing Care Professional for further instructions.

# **Replace dome**


The dome should not be cleaned. When the dome is more or less filled with wax, replace it with a new one.





Hold on to the end of the thin tube and then pull off the dome.

### Step 2



Place the new dome on the thin tube.


### Step 3



Push firmly to ensure that it is fastened securely.

## Thin tube with micro mold or LiteTip

Read the following pages if you have a micro mold or LiteTip ear piece. The micro mold and LiteTip are customized for your ear shape.




# Maintain the micro mold or LiteTip

The ear piece should be cleaned regularly.

The wax filter in the ear piece should be replaced when clogged or when the hearing instrument does not sound normal.

Use the wax filter delivered by your Hearing Care Professional.



# **Optional features and accessories**


The features and accessories described on the following pages are optional. Please contact your Hearing Care Professional to find out how your hearing instrument is programmed.

If you experience difficult listening situations, a special program may be helpful. These are programmed by your Hearing Care Professional.

Write down hearing situations where you may need help.

# ■ Mute the hearing instrument (optional)

Use the mute function if you need to silence the instrument while wearing it.




#### IMPORTANT NOTICE

Do not use the mute function as an off switch, as the hearing instrument still draws current from the battery in this mode.

# **Change programs** (optional)

Your hearing instrument can have up to 4 different programs. These are programmed by your Hearing Care Professional.

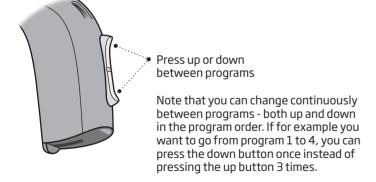


## To be filled out by the Hearing Care Professional

Program		ou will hear actived	When to use
1	<b>)</b>	"1 beep"	
2	4.6	"2 beeps"	
3	الرار	"3 beeps"	
4	תתתת	"4 beeps"	

Program change:	□LEFT	□RIGHT	☐Short press	□ Long press
Program change.	LLEFI	LIKIUHI	□ 3Hort press	La Loring press

# ☐ **Change volume** (optional)

The push button allows you to adjust the volume. You will hear a click when you turn up or down the volume.

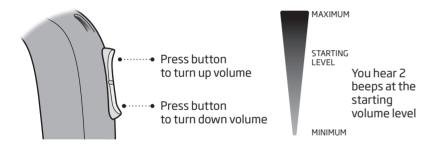


## To be filled out by the Hearing Care Professional

Volume change	□LEFT	□RIGHT	□Short press
---------------	-------	--------	--------------

## **Quick reset**

If you wish to return to the standard settings of the instrument programmed by your Hearing Care Professional, simply open and then close the battery drawer.

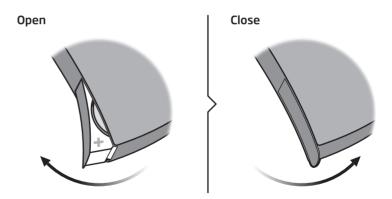

# ☐ **Tamper-resistant battery drawer** (optional)


To keep the battery out of reach of infants, small children and people with learning difficulties, a tamper-resistant battery drawer should be used. Use a small screwdriver to lock and unlock the drawer.

#### IMPORTANT NOTICE

Avoid excessive force to open the battery drawer when in the locked position. Do not force the battery drawer beyond its fully opened position. Make sure to insert the battery correctly.

Please contact your Hearing Care Professional if you suspect the tamper-resistant effectiveness and locking ability is damaged.

## Unlock the battery drawer



Use the screwdriver to turn the screw to unlock position (vertical). Insert the screwdriver into the slit in the bottom of the hearing instrument and push the door open.

## Lock the battery drawer



Make sure the drawer is completely closed. Turn the screw to the locked position (horizontal).

# ■ Wireless accessories (optional)

As an enhancement to your wireless hearing instrument a broad range of wireless accessories are available.

#### ConnectLine

ConnectLine is a family of products that allows you to receive audio signals from TVs, phones, music players, PCs or an external microphone wirelessly through your hearing instrument.

#### Remote Control

The Remote Control offers an opportunity to change program or adjust the volume in your hearing instrument.

#### FΜ

Your hearing instrument supports the option of attaching an FM system. The FM system allows you to receive speech or audio signals directly to your hearing instrument from a dedicated transmitter.

For detailed information on wireless accessories contact your Hearing Care Professional or visit www.oticonusa.com.

# ☐ **Other options** (optional)



#### Telecoil

Telecoil helps you hear better when using a telephone with a built in loop or when you are in buildings with teleloop systems such as theaters, churches or lecture rooms. This symbol or a similar sign is shown wherever a teleloop has been installed.



## Autophone

is a program that can be automatically activated if your telephone has a built in teleloop (see above). A magnet may need to be placed on your telephone next to the sound outlet.

## Direct Audio Input (DAI)

allows your hearing instrument to receive signals directly from external sources such as TV, radio, music players, etc. The DAI adaptor is mounted to your instrument and via a cable connected to an external sound source.

For more information on these options contact your Hearing Care Professional.

#### IMPORTANT NOTICE

When the DAI is connected to an audio source plugged into a wall outlet, the audio source must comply with IEC-60065, IEC-60601 or equivalent safety standards.

You should familiarize yourself fully with the following general warnings before using your hearing instrument for personal safety and to secure correct use.

Consult your Hearing Care Professional if you experience unexpected operations or events with your hearing instrument.

#### Usage of hearing instruments

 Hearing instruments should be used only as directed and adjusted by your Hearing Care Professional. Misuse can result in sudden and permanent hearing loss.  Never allow others to wear your hearing instrument as incorrect usage could cause permanent damage to their hearing.

# Choking hazards & risk of swallowing batteries

 Hearing instruments, their parts, and batteries should be kept out of reach of children and anyone who might swallow these items, or otherwise cause injury to themselves.

- Batteries have occasionally been mistaken for pills. Therefore check your medicine carefully before swallowing any pills.
- Most hearing instruments can be supplied with a tamper-resistant battery drawer upon request. This is strongly recommended for infants, small children, and people with learning difficulties.
- Children below 36 months must always use a tamper-resistant battery drawer. This option is available in BTE, miniBTE, RITE and miniRITE instruments.

If a battery or hearing instrument is swallowed, see a doctor immediately and contact the National Poison Center at 1-800-222-1222 or National Battery Ingestion Hotline at 202-625-3333.

#### Battery use

- Always use batteries recommended by your Hearing Care Professional.
   Batteries of low quality may leak and cause bodily harm.
- Never attempt to recharge your batteries and never dispose of batteries by burning them. There is a risk that the batteries will explode.

#### Dysfunction

 Be aware of the possibility that your hearing instrument may stop working without notice. Keep this in mind when you depend on warning sounds (e.g., when you are in traffic). The hearing instruments may stop functioning, for instance if the batteries have expired or if the tubing is blocked by moisture or ear wax.

#### **Active implants**

- Caution must be taken with active implants. In general, follow the guidelines recommended by manufacturers of implantable defibrillators and pacemakers regarding use with cell phones.
- If you wear an active implant, then keep the hearing instrument more than 15 cm away from the implant and Autophone magnet or MultiTool (has a built in magnet) more than 30 cm away from the implant. E.g., do not carry them in a breast pocket.

 If you have an active brain implant, please contact the manufacturer of your implantable device for information about the risk of disturbance.

#### **Explosives**

 The power source in your hearing instrument has insufficient energy to cause fire in normal usage conditions. The hearing instrument has not been tested for compliance with international standards concerning explosive environments. It is recommended not to use your hearing instrument in areas where there is a danger of explosions.

# X-ray, CT, MR, PET scanning and electrotherapy

 Remove your hearing instrument for example during X-ray, CT / MR / PET scanning, electrotherapy or surgery as your hearing instrument may be damaged when exposed to strong fields.

#### Avoiding heat and chemicals

- Your hearing instrument must never be exposed to extreme heat, e.g., left inside a parked car in the sun.
- Your hearing instrument must not be dried in microwave ovens or other ovens.
- The chemicals in cosmetics, hairspray, perfume, after shave lotion, suntan lotion and insect repellent can damage your hearing instrument. Always remove your hearing instrument before applying such products and allow time to dry before putting it on.

#### Power instrument

 Special care should be excercised in selecting, fitting and using a hearing instrument where maximum sound pressure capability exceeds 132 dB SPL (IEC 711), as there may be risk of impairing the remaining hearing of the hearing instrument user.

For information on whether your instrument is a power instrument, speak with your hearing care professional or consult the settings overview page at the end of this manual.

#### Possible side effects

- Hearing instruments, molds or domes may cause an accelerated accumulation of ear wax.
- The otherwise non-allergenic materials used in hearing instruments may in rare cases cause a skin irritation or any other unusual condition.

Please seek consultation with a physician if these conditions occur.

#### Interference

 Your hearing instrument has been thoroughly tested for interference, according to the most stringent international standards. However, interference with your hearing instrument and other devices may occur (e.g., some cell phones, citizens band systems, and shop alarm systems). If this occurs increase the distance between the hearing instrument and the device.

# Warning to hearing instrument dispensers

A hearing instrument dispenser should advise a prospective hearing instrument user to consult immediately with a licensed physician (preferably an ear specialist) before dispensing a hearing instrument if the hearing instrument dispenser determines through inquiry, actual observation, or review of any other available information concerning the prospective user, that the prospective user has any of the following conditions:

- (i) Visible congenital or traumatic deformity of the ear.
- (ii) History of active drainage from the ear within the previous 90 days.

- (iii) History of sudden or rapidly progressive hearing loss within the previous 90 days.
- (iv) Acute or chronic dizziness.
- (v) Unilateral hearing loss of sudden or recent onset within the previous 90 days.
- (vi) Audiometric air-bone gap equal to or greater than 15 decibels at 500 Hertz (Hz), 1,000 Hz, and 2,000 Hz.
- (vii) Visible evidence of significant cerumen accumulation or a foreign body in the ear canal.
- (viii) Pain or discomfort in the ear.

Special care should be exercised in selecting and fitting a hearing instrument whose maximum sound pressure capability exceeds 132 dB SPL as there may be risk of impairing the remaining hearing of the hearing instrument user.

# Important notice for prospective hearing instrument users

 Good health practice requires that a person with a hearing loss have a medical evaluation by a licensed physician (preferably a physician who specializes in diseases of the ear) before purchasing a hearing instrument. Licensed physicians who specialize in diseases of the ear are often referred to as Otolaryngologists, Otologists or Otorhinolaryngologists. The purpose of medical evaluation is to ensure that all medically treatable conditions that may affect hearing are identified and treated before the hearing instrument is purchased. Following the medical evaluation, the physician will give vou a written statement that states that your hearing loss has been medically evaluated and that you may be considered a candidate for a hearing instrument. The physician will refer you to an audiologist or a hearing instrument dispenser, as appropriate, for a hearing instrument evaluation.

- The audiologist or hearing instrument dispenser will conduct a hearing instrument evaluation to assess your ability to hear with and without a hearing instrument. The hearing instrument evaluation will enable the audiologist or dispenser to select and fit a hearing instrument to your individual needs. If you have reservations about your ability to adapt to amplification, you should inquire about the availability of a trial, rental or purchase-option program. Many hearing instrument dispensers now offer programs that permit you to wear a hearing instrument for a period of time for a nominal fee, after which you may decide if you want to purchase
- the hearing instrument. Federal law limits the sale of hearing instruments to those individuals who have obtained a medical evaluation from a licensed physician.
- Federal law permits a fully informed adult to sign a waiver statement declining the medical evaluation for religious or personal beliefs that preclude consultation with a physician. The exercise of such a waiver is not in your best health interest and its use is strongly discouraged. A hearing instrument will not restore normal hearing and will not prevent or improve a hearing impairment resulting from organic conditions. A hearing instrument is

only part of hearing rehabilitation and may need to be supplemented by auditory training and lip reading.

Children with hearing loss In addition to seeing a physician for medical evaluation, a child with a hearing loss should be directed to an audiologist for evaluation and rehabilitation, since hearing loss may cause problems in language development and educational and social growth of a child. An audiologist is qualified by training and experience to assist in the evaluation and rehabilitation of a child with a hearing loss. If the user is an infant, small child, or person of mental incapacity, it is recommended that the hearing instrument be modified with a tamperresistant battery compartment.

# Troubleshooting guide

Symptom	Possible causes	Solutions	
	Worn-out battery	Replace the battery	
No sound	Clogged tube or earpieces (mold, dome, GripTip, micro mold or LiteTip)	Clean mold	
		Clean Corda miniFit (thin tube), replace dome or GripTip or replace wax filter	
	Clogged sound outlet	Clean mold	
		Clean Corda miniFit (thin tube), replace dome or GripTip or replace wax filter	
Intermittent or reduced sound	Moisture	Wipe battery with a dry cloth and/or dry tube	
	Worn-out battery	Replace the battery	
	Clogged damping filter in sound hook	Contact your Hearing Care Professional for assistance	
Caucaling noise	Hearing instrument earpiece inserted incorrectly	Re-insert earpiece (mold, dome, GripTip, micro mold or LiteTip)	
Squealing noise	Ear wax accumulated in ear canal	Have ear canal examined by your doctor	

If none of the above solutions work, consult your Hearing Care Professional for assistance.

## **Water resistance**

Your hearing instrument is water resistant which means it is designed to be worn in all daily life situations. Therefore you do not have to worry about sweat or getting wet in the rain. Should your hearing instrument come in contact with water and stop working, please follow these guidelines:

- 1. Gently wipe off any water
- Open the battery drawer and remove the battery and gently wipe off any water in the battery drawer
- 3. Let the hearing instrument dry with the battery drawer left open for approximately 30 minutes
- 4. Insert a new battery

#### IMPORTANT NOTICE

Do not wear your hearing instrument while showering or participating in water activities. Do not immerse your hearing instrument in water or other liquids.

# **Warranty certificate**

Name of owner:	
	Month:
	Serial no.:
	Serial no.:
	Scharmon

# **International warranty**

Your hearing instrument is covered by an international limited warranty issued by the manufacturer for a period of 12 months from the date of delivery. This limited warranty covers manufacturing and material defects in the hearing instrument itself, but not accessories such as batteries. tubing, ear wax filters etc. Problems arising from improper handling or care, excessive use, accidents, repairs made by an unauthorized party, exposure to corrosive conditions, physical changes in your ear, damage due to foreign objects entering the device, or incorrect adjustments are NOT covered by the limited warranty and may void it. The above warranty does not affect any legal rights that you

might have under applicable national legislation governing sale of consumer goods. Your Hearing Care Professional may have issued a warranty that goes beyond the clauses of this limited warranty. Please consult him/her for further information.

#### If you need service

Take your hearing instrument to your Hearing Care Professional, who may be able to sort out minor problems and adjustments immediately.

# **Cell phone**

Some hearing instrument users have reported a buzzing sound in their hearing instrument when they are using cell phones, indicating that the cell phone and hearing instrument may not be compatible.

According to the ANSI C63.19 standard (ANSI C63.19-2007 American National Standard Methods of Measurement of Compatibility Between Wireless Communications Devices and Hearing Aids), the compatibility of a particular hearing instrument and cell phone can be predicted by adding the rating for the hearing instrument immunity to the rating for the cell phone emissions.

For example, the sum of a hearing instrument rating of 2 (M2/T2) and a telephone rating of 3 (M3/T3) would result in a combined rating of 5. Any combined rating that equals at least 5 would provide "normal use"; a combined rating of 6 or greater would indicate "excellent performance".

The immunity of this hearing instrument is M3/T3. The equipment performance measurements, categories, and system classifications are based upon the best information available but cannot quarantee that all users will be satisfied.

#### IMPORTANT NOTICE

The performance of individual hearing instruments may vary with individual cell phones. Therefore, please try this hearing instrument with your cell phone or, if you are purchasing a new phone, be sure to try it with your hearing instrument prior to purchase.

For additional guidance, please ask your cell phone provider for the booklet entitled "Hearing Aid Compatibility with Digital Wireless Cell Phones."

## **Technical information**

The hearing instrument contains a radio transmitter using short range magnetic induction technology working at 3.84 MHz. The magnetic field strength of the transmitter is < -42 dBuA/m @ 10m.

The emission power from the radio system is well below international emission limits for human exposure. For comparison, the radiation of the hearing instrument is lower than unintended electromagnetic radiation from, for example, halogen lamps, computer monitors, dishwashers, etc. The hearing instrument complies with international standards concerning Electromagnetic Compatibility.

Due to the limited space available on the instruments all relevant approval markings are found in this document. The hearing instrument contains a module with:

FCC ID: U28FU2BTERIT IC: 1350B-FU2BTERIT

The device complies with Part 15 of the FCC rules and RSS-210 of Industry Canada.

Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

More information: www.oticon.com

Oticon declares that this hearing instrument is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Declaration of conformity is available at:

Oticon A/S Kongebakken 9 DK-2765 Smørum Denmark www.oticon.com

# C€ 0543 0682





IP58

Power instrument ☐ Yes ☐ No							
	Settings overview for your hearing instrument						
Le	ft		Rig	jht			
☐ Yes	□No	Volume control	☐ Yes	□No			
☐ Yes	□No	Program shift	☐ Yes	□No			
☐ Yes	□No	Mute	☐ Yes	□No			
	Volume control indicators						
□ On	☐ Off	Beeps at min /max volume	□On	☐ Off			
□ On	☐ Off	Clicks when changing volume	□On	☐ Off			
□ On	☐ Off	Beeps at preferred volume	□ On	☐ Off			
Battery indicators							
□ On	☐ Off	Low battery warning	□On	□Off			

65

# TECHNICAL DATA

BTE



Measurements according to American National	0 dB SPL ref. 20 mPa
Standard ANSI S 3.22	Peak OSPL90
(2003) and \$3.7 (1995).	HF Average OSPL90
(2003) and 3011 (2003).	Peak Full-on Gain
Supply voltage:	HF Average Full-on Ga
Battery Zinc Air 1.4 Volt	Reference Test Gain
	Frequency Range
	Total Harmonic Distor
	Total Harmonic Distor
	Total Harmonic Distor
	Battery Consumption
	Equivalent Input Noise
	HF Average SPLITS (le
	Attack Time
	Release Time
	* For instruments fitted w

85	100
117 (123*) dB SPL	126 (128*) dB SPL
113 (106*) dB SPL	120 (115*) dB SPL

BTE13100

62 ms

		` '	, ,
Peak Full-on Gain		51 (59*) dB	60 (62*) dB
HF Average Full-on Gain		44 (41*) dB	53 (49*) dB
Reference Test Gain		36 dB	43 dB
Frequency Range		100-7700 Hz	100-7400 Hz
Total Harmonic Distortion	500 Hz	<2%	<2%
Total Harmonic Distortion	800 Hz	<2%	<2%
Total Harmonic Distortion	1600 Hz	<2%	<2%
Battery Consumption		1.1 mA	1.1 mA
Equivalent Input Noise Level (omni/dir)		18/27 dB SPL	16/26 dB SPL
HF Average SPLITS (left/right ear)		94/94 dB SPL	100/100 dB SPL
Attack Time		1 ms	1 ms

BTE13 85

55 ms

<sup>1</sup> ms


<sup>\*</sup> For instruments fitted with thin tube

BTE1385

**OSPL90 - Output Sound Pressure Level** 

85


Input: 90 dB SPL.
Technical setting: A0



Full-on Gain

Input: 50 dB SPL. Technical setting: A0

Sound Hook w/DamperThin tube (size 1/0.9)




BTE13 100

OSPL90 - Output Sound Pressure Level

100


Input: 90 dB SPL.
Technical setting: A0



Full-on Gain

Input: 50 dB SPL. Technical setting: A0

Sound Hook
Thin tube
(size 1/1.3)



TECHNICAL DATA

BTE



Measurements according to American National Standard ANSI S 3.22 (2003) and S3.7 (1995).	
Supply voltage: Battery Zinc Air 1.4 Volt	

85	100
117 (123*) dB SPL	126 (128*) dB SPL
113 (106*) dB SPL	120 (115*) dB SPL

BTE13 85

Peak Full-on Gain	51 (59*) dB	60 (62*) dB
HF Average Full-on Gain	44 (41*) dB	53 (49*) dB
Reference Test Gain	36 dB	43 dB
Frequency Range	100-7000 Hz	100-6000Hz
Total Harmonic Distortion 500 Hz	<2%	<2%
Total Harmonic Distortion 800 Hz	<2%	<2%
Total Harmonic Distortion 1600 Hz	<2%	<2%
Battery Consumption	1.1 mA	1.1 mA
Equivalent Input Noise Level (omni/dir	) 18/27 dB SPL	16/26 dB SPL
HF Average SPLITS (left/right ear)	94/94 dB SPL	100/100 dB SPL
Attack Time	1 ms	1 ms

0 dB SPL ref. 20 mPa

HF Average OSPL90

Peak OSPL90

Release Time

BTE13100

<sup>55</sup> ms 62 ms

<sup>\*</sup> For instruments fitted with thin tube


<sup>1</sup> ms

BTE1385

**OSPL90 - Output Sound Pressure Level** 

85


Input: 90 dB SPL. Technical setting: A0



Full-on Gain

Input: 50 dB SPL. Technical setting: A0

Sound Hook w/DamperThin tube (size 1/0.9)




BTE13 100

OSPL90 - Output Sound Pressure Level

100


Input: 90 dB SPL.
Technical setting: A0



Full-on Gain

Input: 50 dB SPL. Technical setting: A0

Sound Hook
Thin tube
(size 1/1.3)



151119US/01.15

## **People First**

People First is our promise to empower people to communicate freely, interact naturally and participate actively



