

Your Information	Step 1: Account Information										Step 2: Patient Information									
	Ship to Account:										First Name:									
	Account Name:										Last Name:									
	Address:										Age:									
	City: State: Zip:										Last 4 digits of Social Security #:									
	Phone #:										Audiometric Information <i>(required)</i>									
	Contact Name:										Hz: 250 500 1k 2k 3k 4k 6k 8k									
	E-mail <i>(required)</i> :										Right:									
	Bill to Account:										Left:									
	Date: Fitting Date:										Step 3: Fitter's Information									
Purchase Order #:										Fitter's Name:										
										Fitter's E-mail:										

Step 4: Select Style																			
Bluetooth® + NFMI (2.4 GHz Wireless)					NFMI (Binaural Coordination only)					Invisibility (Non-Wireless)									
ITC[†]					CIC					IIC									
312					10					10									
HS[†] (half shell)					Select Options					CIC									
312					Push button					10									
FS[†] (full shell)					Fitting Level					Push Button (CIC ONLY)									
312					75					90									
Select Options					Accessories					Fitting Level									
Push button					Note: Accessories are not available without Bluetooth					75									
Volume wheel					Other Notes					90									
					For Tinnitus SoundSupport™, a push button and NFMI are required														
Fitting Level										Accessories									
75										Note: Accessories are not available without Bluetooth									
90																			
100																			
Accessories																			
ConnectClip																			
Remote Control 3.0																			
Phone Adapter 2.0 (ConnectClip Required)																			
TV Adapter 3.0																			
EduMic																			
Other Notes																			
Make Size as True HS for Dexterity Issues																			
Push button required to activate flight mode																			
For Tinnitus SoundSupport™, a push button and NFMI are required																			
										Impressions									
										Use new impression(s)									
										Use scan(s) on file _____									
										Impression(s) will be destroyed unless otherwise requested.									

Step 5: Select Product Options									
Faceplate Color					Shell Color				
Beige (STD CIC/ITC/HS/FS)					Beige (STD CIC/ITC/HS/FS)				
Light Brown					Light Brown				
Med. Brown					Med. Brown				
Dark Brown					Dark Brown				
Black (STD IIC)					Black				
Vent Size (Factory select unless marked)					Transparent (clear)				
					Red & Blue (STD IIC)				
					Canal Length (Factory select unless marked)				
					As marked				
Max Vent					Short (before 1 st bend)				
Extra Large 3.0					Medium (at 1 st bend)				
Large 2.4					Long (before 2 nd bend)				
Medium 1.4									
Small 1.0									
Retention					Removal				
Canal Lock (CIC/ITC/HS)					Removal Cord (STD for IIC/CIC)				
Helix Lock (CIC/ITC/HS)					Heavy Removal Cord (N/A for IIC)				
Clothing Loop (N/A for IIC/CIC)					Large Ball Removal Cord				
Heavy Clothing Loop (N/A for IIC/CIC)					Tactile / Other				
Shell Finish (Choose one only)					Raised Push Button				
Soft Coat					Raised Vol. Wheel				
Matte Finish					Large Vol. Wheel				
					Raised, Large Vol. Wheel				
					Battery door indicator				
					Door hooks (N/A for IIC)				
					Extended receiver tubing (N/A for IIC)				
Visual Indicators									
Color Dots					Initials on shell				
Name on shell (Name if possible, otherwise initials)									
Canal Tips Red/Blue					L&R on Shell				

Special Instructions:

Please Send:

Programming Adapter Mini Service Ord. Forms

RITE Mold Forms New Cables

Impression Boxes Flex Strips

Custom ITE Forms Airbills


Return Impressions Shipping Bags

INTERNAL USE ONLY
DO NOT WRITE

Polaris™ Custom Order Form - Reference Guide

Custom Products

Offering a full range of custom models and styles. With Oticon Own, there is a custom product for all your patients' needs.

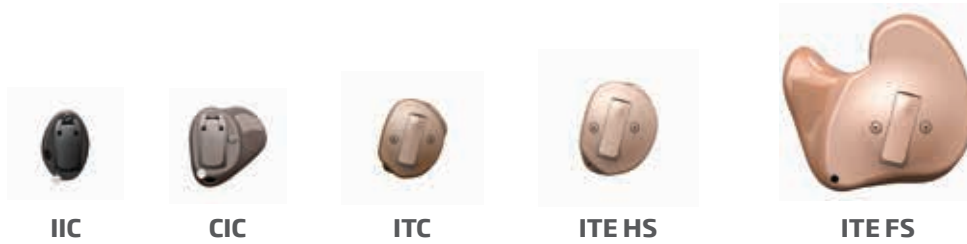

How to Choose:

Invisibility

Choose an IIC or CIC for optimal discreetness, offered as Non-Wireless models only.*

NFMI (Binaural Coordination)


Choose a CIC for enabling binaural instrument communication, maximizing Oticon's audiological features.* *Wireless programming is not available with NFMI only devices.*

Bluetooth 2.4 GHz + NFMI (Wireless)

Choose an ITC, HS, or FS for direct Bluetooth streaming to both ears and binaural instrument communication, fully compatible with all connectivity devices including ConnectClip, EduMic, Remote Control 3.0, Phone Adapter 2.0, and TV Adapter 3.0.

*Connectivity accessories, including remote control, are not available.

Getting the Fit Right - It starts with the impression



Be sure to provide an impression with a full concha and helix area and a canal past the second bend regardless of the model selected.

Vents are calculated in Genie 2 unless otherwise specified in the "Vent Size" or "Special Instruction" section on the order form.

Sample options for vision and/or dexterity concerns

Large ball



Raised push button



VW large, small or raised



Clothing loop



Options available space permitting and may not be available on all models.

Accessories



T-Cap

The nano-coated, wax-repellent T-Cap filter is used for all miniature custom styles using size 10 batteries.



T-Cap (mic cover)

Gray compact/Black tools

Part Number (1 pc):

123328 - Beige
123330 - Light Brown
123331 - Med Brown
123329 - Dark Brown
123327 - Black



O-Cap

The nano-coated O-Cap microphone protection filter is designed to reject wax and fits all instruments using battery size 312.



O-Cap (mic cover)

Gray compact/Black tools

Part Number (1 pc):

128003 - Beige
128004 - Light Brown
128005 - Med Brown
128006 - Dark Brown
252488 - Black



ProWax miniFit

Providing advanced receiver port protection, the ProWax miniFit filter fits all Polaris and Velox custom hearing aid styles.



ProWax miniFit

Gray "turtle"/Black tools

Part Number (1 pc):

128057